



1	VCC
2	GND
3	LEDA
4	RESET
5	/CS
6	RS
7	WR
8	RD
9	D0
10	D1
11	D2
12	D3
13	D4
14	D5
15	D6
16	D7
17	D8
18	D9
19	D10
20	D11
21	D12
22	D13
23	D14
24	D15

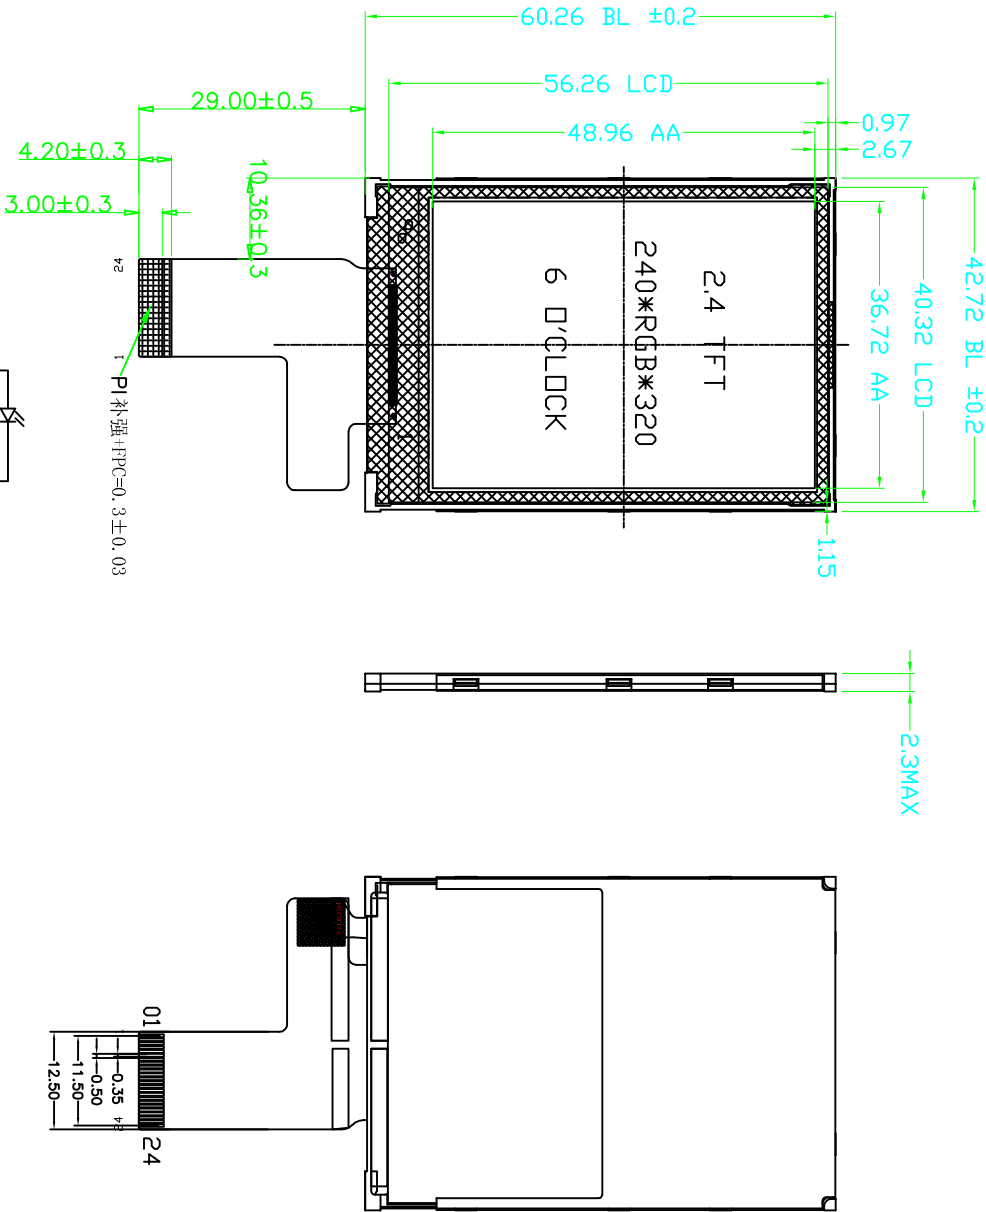

背光电路图 (Circuit Diagram)

- Specification:
- (1). Viewing angle: 6 O'clock
 - (2). Display mode: 262K TFT/Normally White/Transmissive
 - (3). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
 - (4). IC: ST7789V
 - (5). Backlight: 4 chip White LED, in Parallel Vr: 3.2 V If: 60 mA
 - (6). Dimensions with mark "*" are important, with mark "()" are referenced
 - (7). Request ROHS

REVISION RECORD

DATE

LCDRONIC

PRODUCT MODEL: 2.4TFT-24

SCALE: FIT

DRAWN BY

DATE

UNIT: mm

CHECKED BY

DATE

PRO.(3):

APPROVED BY

DATE

SHEET: 1/5