



REV	DESCRIPTION:	DATE
V00	First Issue	

PIN	FUNCTION	SYMBOl
1	DB1	
2	DB2	
3	DB3	
4	DB4	
5	GND	
6	VCC	
7	/CS	
8	RS	
9	/WR	
10	/RD	
11	NC	
12	XL	
13	YU	
14	XR	
15	YD	
16	LED4	
17	LEDX	
18	LEDX2	
19	LEDK3	
20	LEDK4	
21	LEDK5	
22	DB5	
23	DB10	
24	DB11	
25	DB12	
26	DB13	
27	DB14	
28	DB15	
29	DB16	
30	DB17	
31	/RESPT	
32	VCI(2.8V)	
33	RESCT(41)	
34	GND	
35	DB5	
36	DB6	
37	DB7	

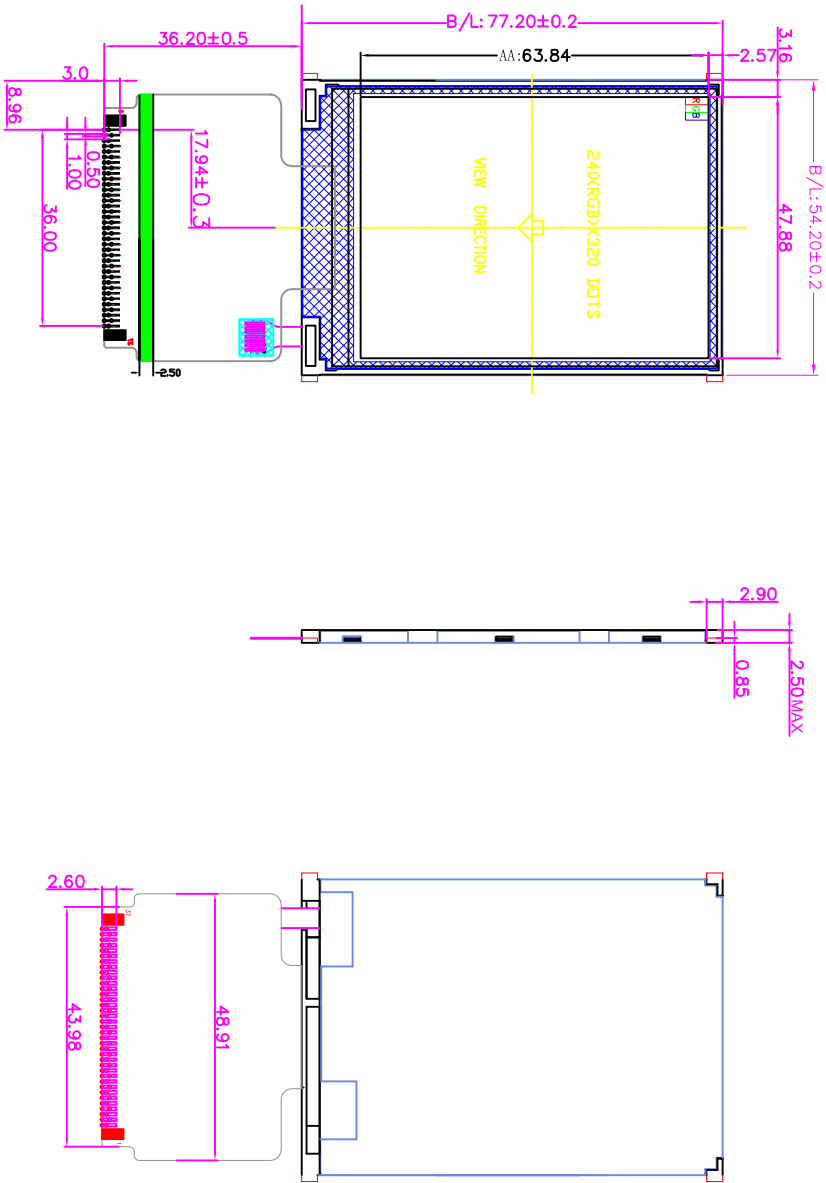


NOTES:

1. DISPLAY TYPE: 3.2" TFT, TRANSMISSIVE
2. DRIVER IC: IL19341
3. VIEWING DIRECTION: 12 o'clock
4. BACKLIGHT: 4 CHIP-WHITE LED
5. BL INPUT CURRENT: 80 mA
6. OPERATING TEMP: $-20^{\circ}C \sim +70^{\circ}C$
7. STORAGE TEMP: $-30^{\circ}C \sim +80^{\circ}C$
8. GENERAL TOLERANCE: ± 0.2
9. The product should measure up with "RoHS" standard



LCDRONIC



PRJ(3)

UNIT: MM	SIZE: A4	Scale: 1/1	GENERAL TOLERANCE: ± 0.2	Angle=1°
DESIGNED:		DATE: 2023-07-25		
CHECKED:		DATE:		
APPROVED:		DATE:		
		PROJECT NO.	SZWD03_2TFT-240320-37	
		PART NO.		
		REV: V00		