

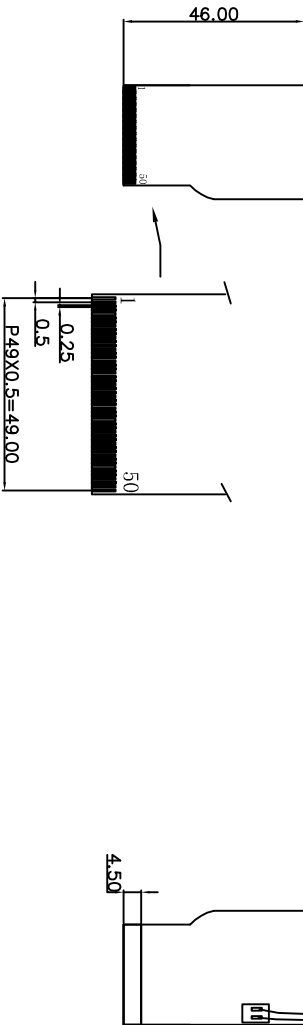



REV	DESCRIPTION:	DATE
V00	First Issue	

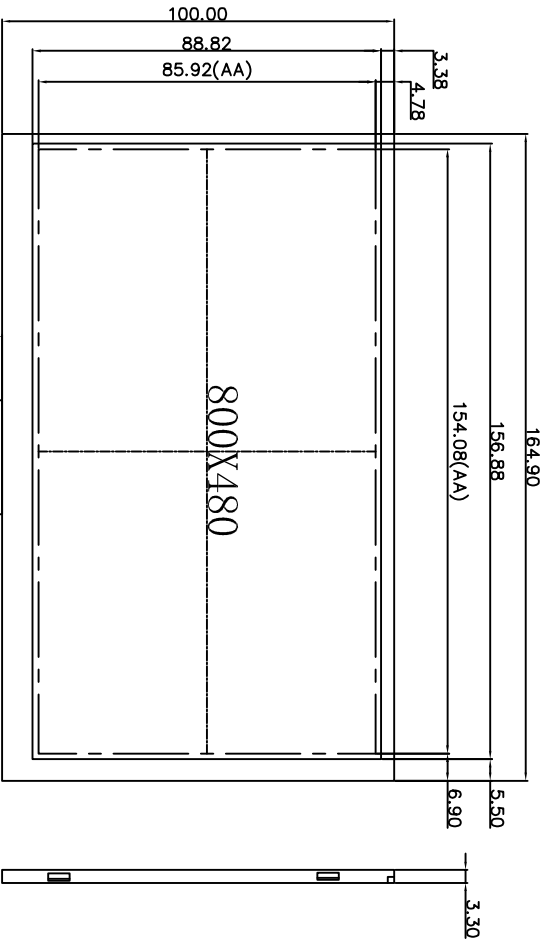


1	LED+	26	G1
2	LED+	27	G0
3	LED-	28	R7
4	LED-	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	DVID	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VSD	35	R0
11	HSD	36	GND
12	B7	37	DCLK
13	B6	38	GND
14	B5	39	SHLR
15	B4	40	UPDN
16	B3	41	VDDG
17	B2	42	VEEG
18	B1	43	AVDD
19	B0	44	RSTB
20	G7	45	NC
21	G6	46	VCOM
22	G5	47	DITH
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

- NOTES:
1. DISPLAY TYPE: 7.0" TFT, TRANSMISSIVE
 2. VIEWING DIRECTION: 6 0'clock
 3. BACKLIGHT: 18 CHIP-WHITE LED
 4. BL INPUT CURRENT: 120 mA
 5. OPERATING TEMP: -20° C~+70° C
 6. STORAGE TEMP: -30° C~+80° C
 7. GENERAL TOLERANCE: ±0.2



LCDRONIC



PRJ(3)

UNIT: MM		SIZE: A4	Scale: 1/1	GENERAL TOLERANCE: ±0.2		Angle=1°	
DESIGNED:		DATE:		PROJECT NO		TFT7. 0-800480-50	
CHECKED:		DATE:		PART NO.		SHEET:1/1	
APPROVED:		DATE:		REV:		V00	