
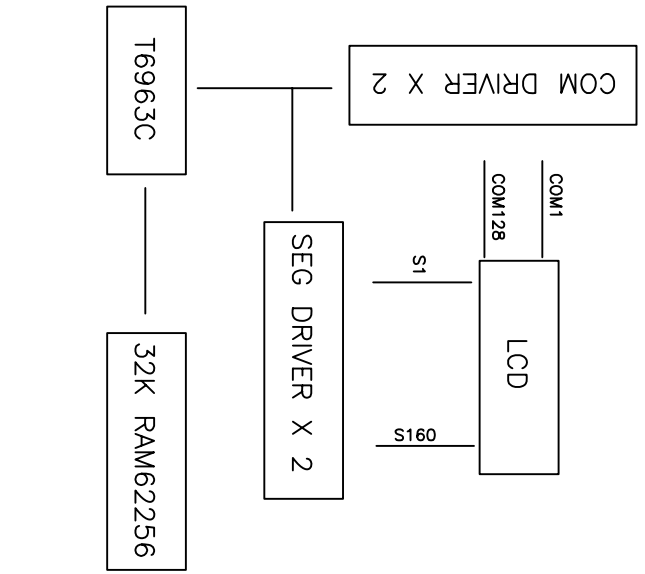


REV.	CHANGE CONTENT	BY	DATE

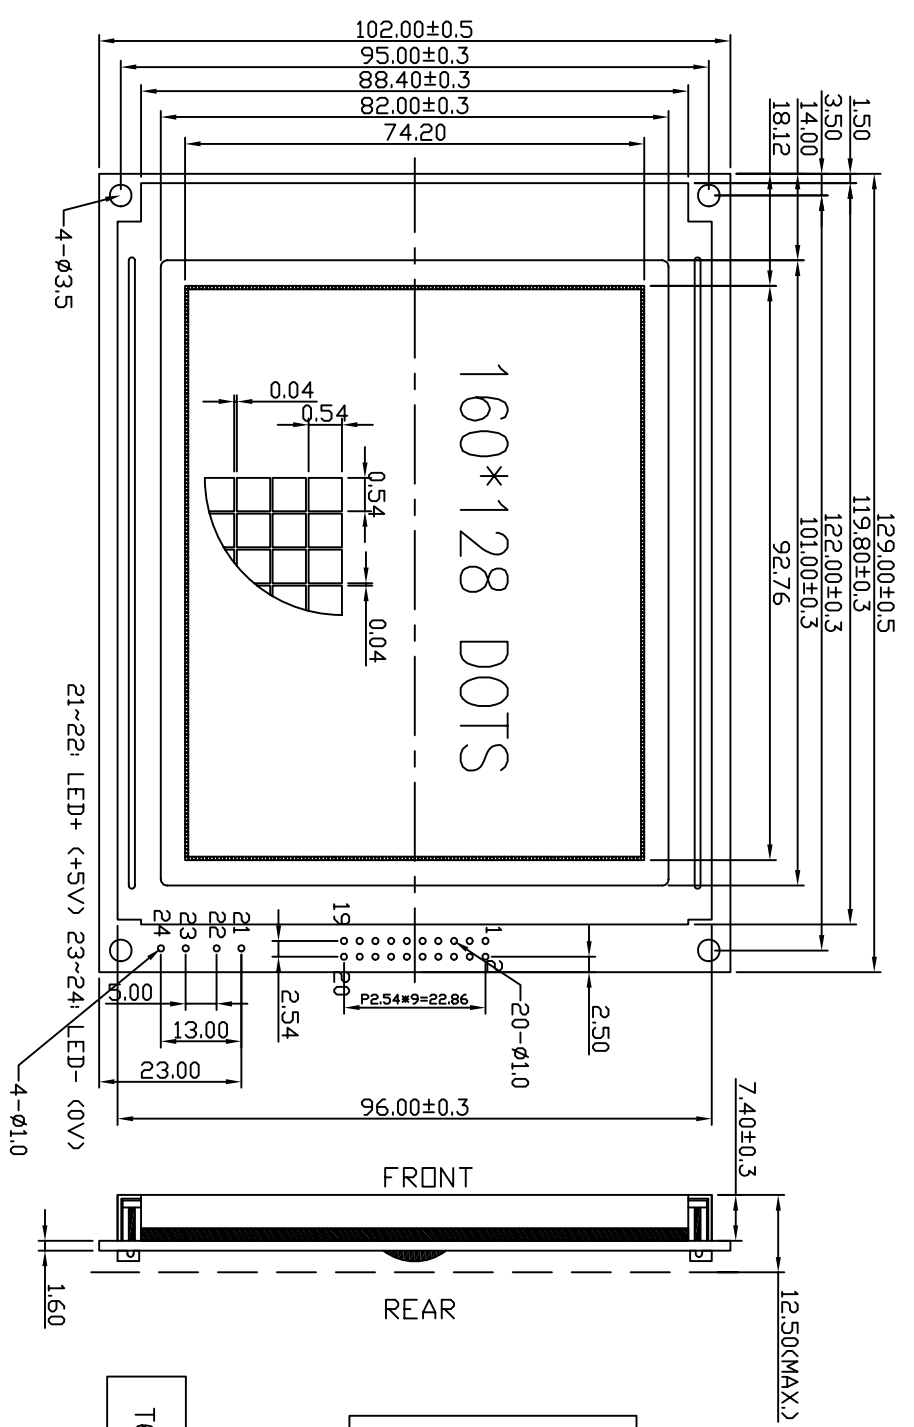

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
SYMBOL	FG	VSS	VDD	Vo	VEE	/WR	/RD	/CE	C/D	/HALT	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC

- NOTE:
1. DISPLAY MODE: STN, POSITIVE/TRANSPARENT/YELLOW-GREEN
 2. VIEWING DIRECTION: 6:00
 3. OPERATION TEMP.: -20°C~70°C
 4. STORAGE TEMP.: -30°C~80°C
 5. DRIVE METHOD: 1/128 DUTY, 1/12BIAS, Vop18.4V, VDD5.0V
 6. BACKLIGHT: WHITE, VDD_{LED}=5.0V(Vf=3.4V(typ.)), If=120mA(typ.), 70CD/m²(min.) WITHOUT LCD
 8. DRIVER: T6963C(1), S6B086(4)

LCDRONIC

TOLERANCE				L C D R O N I C				DRAWING No.: HG16012801C-YF62L-VA			
>0~6 ±0.10								DRAWING TITLE: LCD MODULE			
>6~80 ±0.20											
>80~240 ±0.30											
>240~400 ±0.50				DESIGN	LI JINTANG	05.10.25	STANDARD				
// L ±0.10				CHECKED			TECHNOLOGY				
				APPROVED			QA				
				REV. : A		SCALE : -		PROJECTION:			
											
								SHEET : 1/1			

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1