


REV.	CHANGE CONTENT	BY	DATE

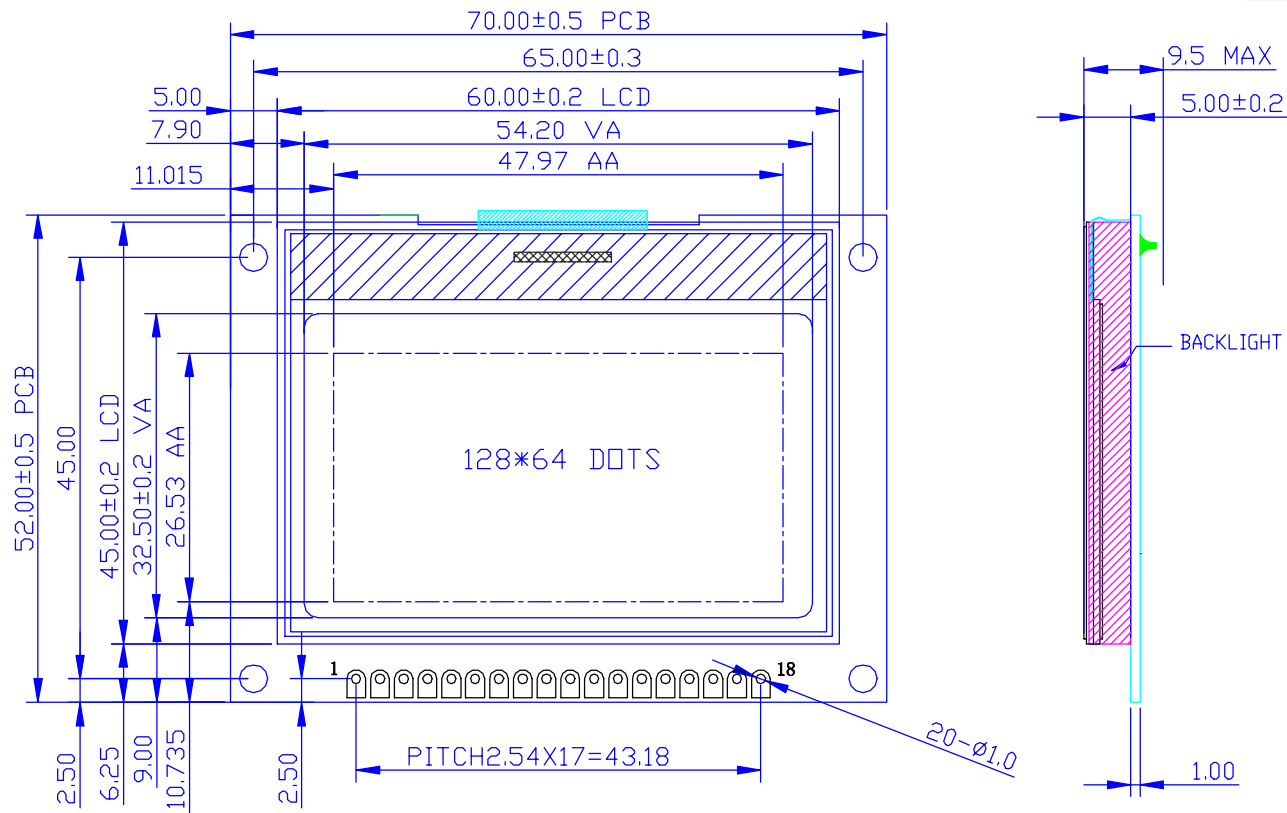

1	/CS
2	/RES
3	A0
4	/WR(R/W)
5	/RD(E)
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6(SCL)
13	DB7(SI)
14	VDD
15	VSS
16	C86
17	P/S
18	LED+

NOTES:

1. DISPLAY TYPE: STN Y-G
2. DISPLAY MODE: TRANSFLECTIVE POSITIVE
3. VIEWING DIRECION: 6 O'CLOCK
4. VDD: 2.7~3.3 V
5. OPERATING TEMP: -10°C TO 60°C
STORAGE TEMP: -20°C TO 70°C
6. DRIVER IC: ST7565R
7. LED: GREEN Vled=5.0V, If=40mA(MAX)



LCDRONIC

DRAWING No. :HG12864G-01

DRAWING TITLE : LCM Drawing

FILE NO. : 7

DESIGN	JHG	STANDARD
CHECKED		TECHNOLOGY
APPROVED		Q.A

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1