


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
COM1	COM1	--	--	--	i4	--	1D	a	2D	2P	3D	4D	4P	5D	5P	6D	k1	v1	V1
COM2	--	COM2	--	--	i3	--	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C	W1
COM3	--	--	COM3	--	i2	c	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B	A1
COM4	--	--	--	COM4	i1	b	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	r1

PIN	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
COM1	7D	7P	8D	8P	9D	9P	10D	10P	11D	k2	v2	12D	12P	13D	13P	14D	14P	15D	15P	16D	k3	v3
COM2	7E	7C	8E	8C	9E	9C	10E	10C	11E	11C	W2	12E	12C	13E	13C	14E	14C	15E	15C	16E	16C	W3
COM3	7G	7B	8G	8B	9G	9B	10G	10B	11G	11B	A2	12G	12B	13G	13B	14G	14B	15G	15B	16G	16B	A3
COM4	7F	7A	8F	8A	9F	9A	10F	10A	11F	11A	r2	12F	12A	13F	13A	14F	14A	15F	15A	16F	16A	r3

PIN	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56
COM1	COM1	--	--	--	o1	17F	17A	18F	18A	19F	19A	20F	20A	21F	21A
COM2	--	COM2	--	--	o2	17G	17B	18G	18B	19G	19B	20G	20B	21G	21B
COM3	--	--	COM3	--	o3	17E	17C	18E	18C	19E	19C	20E	20C	21E	21C
COM4	--	--	--	COM4	o4	17D	17P	18D	18P	19D	19P	20D	20P	21D	Hz

PIN	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72
COM1	22D	22P	23D	23P	24D	kWh	25D	25P	26D	26P	27D	27P	28D	28P	29D	kvarh
COM2	22E	22C	23E	23C	24E	24C	25E	25C	26E	26C	27E	27C	28E	28C	29E	29C
COM3	22G	22B	23G	23B	24G	24B	25G	25B	26G	26B	27G	27B	28G	28B	29G	29B
COM4	22F	22A	23F	23A	24F	24A	25F	25A	26F	26A	27F	27A	28F	28A	29F	29A

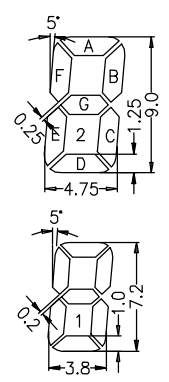

- NOTES:
1. STRONG VIEWING DIRECTION (视角): 6 O'CLOCK
 2. V-OP (电压): 3.0 V
 3. DRIVE METHOD (驱动方式): 1/4 DUTY(占空比); 1/3 BIAS(偏压比)
 4. OPERATING TEMP.(工作温度): -20°C TO 70 °C
 5. STORAGE TEMP.(储存温度): -30°C TO 80 °C
 6. POLARIZER(偏光片): TRANSFLECTIVE / POSITIVE(正性)
 7. DISPLAY TYPE(显示屏类型): HTN

LCDRONIC					
LCD NO		CUSTOMER NO.		SHEET NO.	
		---		1 OF 1	
APPROVED BY		CHECKED BY		DESIGNED BY	
				DRAWN BY	
				SCALE 2 : 1	
				UNIT mm	
				DATE	
				2011-08-12	