


| REV | DESCRIPTION: | DATE |
|-----|--------------|------|
| V00 | First Issue  |      |

|    |      |    |        |
|----|------|----|--------|
| 1  | LED- | 26 | B5     |
| 2  | LED+ | 27 | B6     |
| 3  | GND  | 28 | B7     |
| 4  | VDD  | 29 | DGND   |
| 5  | R0   | 30 | DCLK   |
| 6  | R1   | 31 | DISP   |
| 7  | R2   | 32 | HSYNC  |
| 8  | R3   | 33 | VSYNCG |
| 9  | R4   | 34 | DE     |
| 10 | R5   | 35 | NC     |
| 11 | R6   | 36 | GND    |
| 12 | R7   | 37 | XR     |
| 13 | G0   | 38 | YD     |
| 14 | G1   | 39 | XL     |
| 15 | G2   | 40 | YU     |
| 16 | G3   | 41 |        |
| 17 | G4   | 42 |        |
| 18 | G5   | 43 |        |
| 19 | G6   | 44 |        |
| 20 | G7   | 45 |        |
| 21 | B0   | 46 |        |
| 22 | B1   | 47 |        |
| 23 | B2   | 48 |        |
| 24 | B3   | 49 |        |
| 25 | B4   | 50 |        |

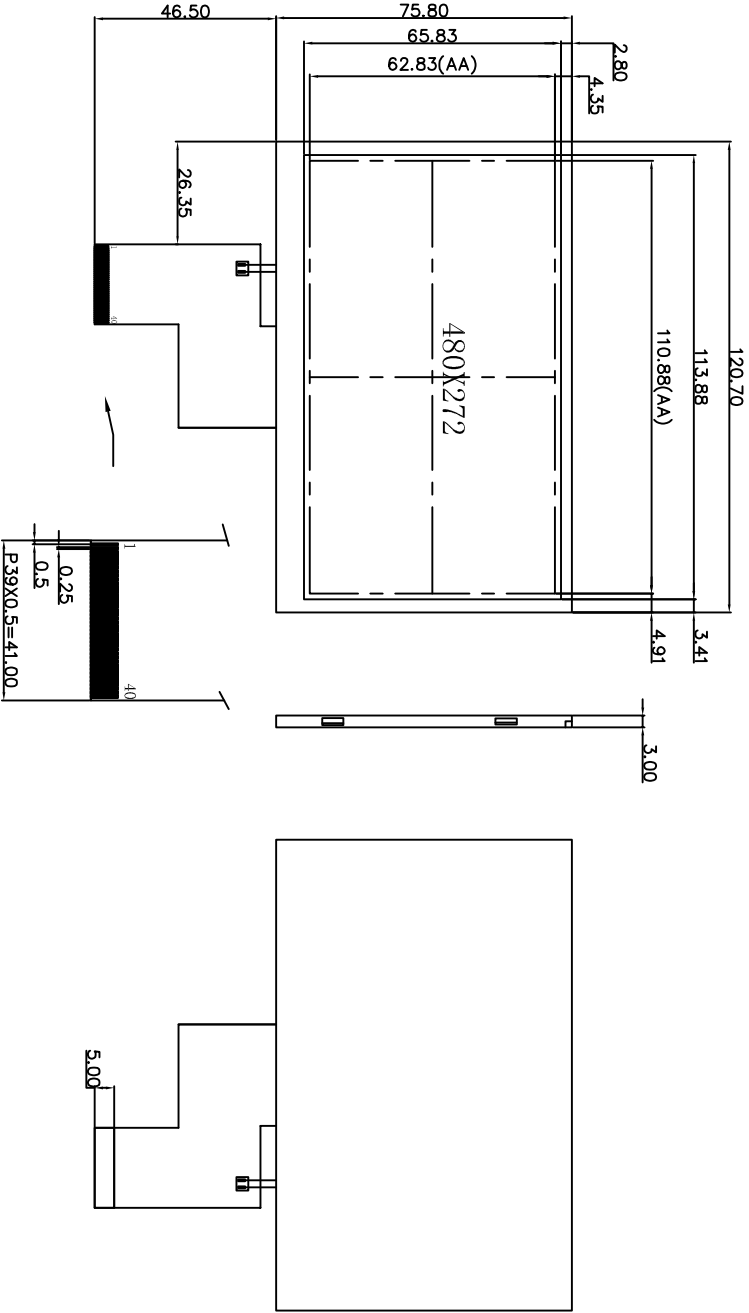


NOTES:

1. DISPLAY TYPE: 5.0" TFT, TRANSMISSIVE
2. VIEWING DIRECTION: 6 o'clock
3. BACKLIGHT: 12 CHIP-WHITE LED
4. BL INPUT CURRENT: 40 mA
5. OPERATING TEMP: -20° C ~ +70° C
6. STORAGE TEMP: -30° C ~ +80° C
7. GENERAL TOLERANCE: ±0.2



V<sub>F</sub>=19.2V (TYP)  
BACKLIGHT CIRCUIT

LCDRONIC



PRJ(3)

| UNIT: MM  | SIZE: A4 | Scale: 1/1 | GENERAL TOLERANCE: ±0.2<br>Angle=1° | PROJECT NO       | DATE | PART NO. | REV: V00 |
|-----------|----------|------------|-------------------------------------|------------------|------|----------|----------|
| DESIGNED: |          | DATE:      |                                     | TFT5.0-480272-40 |      |          |          |
| CHECKED:  |          | DATE:      |                                     |                  |      |          |          |
| APPROVED: |          | DATE:      |                                     |                  |      |          |          |