

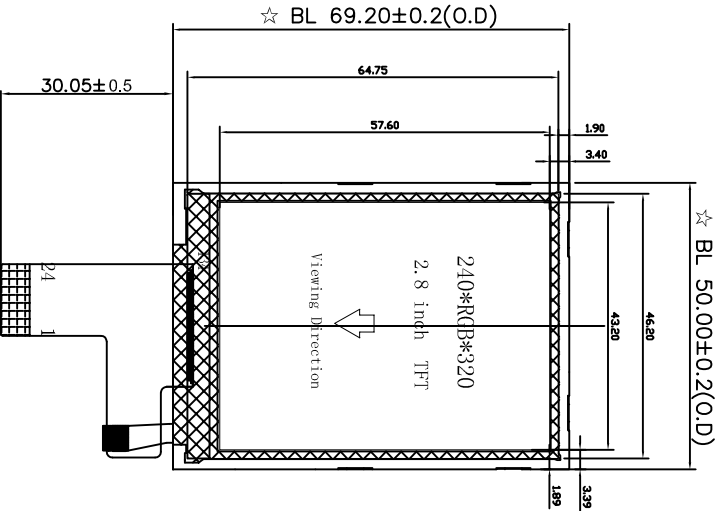



REV	DESCRIPTION:	DATE
V00	First issue	

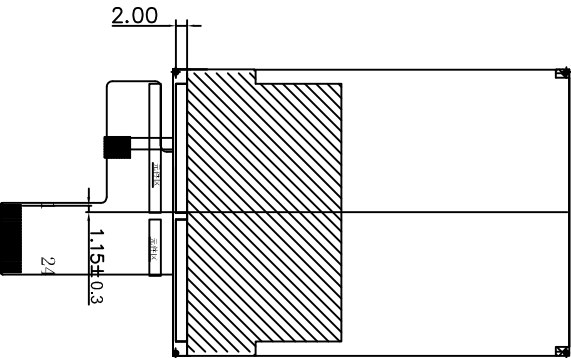

PI+FPC=0.3±0.03

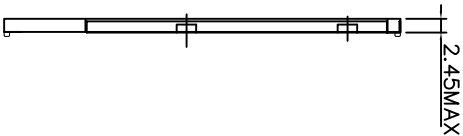

VF=3.2V (TYP)
BACKLIGHT CIRCUIT

1	VCC
2	GND
3	LEDA
4	/RESET
5	/CS
6	/RS
7	/WR
8	/RD
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15

NOTES:

1. DISPLAY TYPE: 2.8" TFT, TRANSMISSIVE
2. DRIVER IC: ST7789 & Compatible LDI
3. VIEWING DIRECTION: 12 O'clock
4. BACKLIGHT: 4 CHIP-WHITE LED
5. BL INPUT CURRENT: 60 mA
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. GENERAL TOLERANCE: ±0.2
9. The product should measure up with "RoHS" standard

REVISION RECORD	DATE
0	
1	
2	
3	
4	

LCDRONIC			
PRODUCT MODEL: 2.8TFT-24		SCALE: 1:1	
DRAWN BY	DATE	UNIT: mm	
CHECKED BY	DATE	PRO.(S)	
APPROVED BY	DATE	SHEET: 1/5	